

HSF

NOTES:


Current Rating: 0.5A/Contact
 Voltage Rating: 250V AC
 Contact Resistance: 35 milliohm Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500Megohm Min
 Operation Temperature: -20°C to +105°C

Housing Material: PBT+30%G.F UL94V-0 BK
 Cover Material: PBT+30%G.F UL94V-0 BK
 Terminal Material: Phosphor Bronze
 Board Lock Material: Phosphor Bronze
 Terminal plating: Sn-Au over Ni
 Board Lock plating: Sn over Ni






Ordering Information

6320D-XXX RD XX P X X OX

No. of Pins Contact Plating Type Packing
 S1=3u"Gold/Tin W: With Board Lock T=Tube
 S2=5u"Gold/Tin N: Without Board Lock

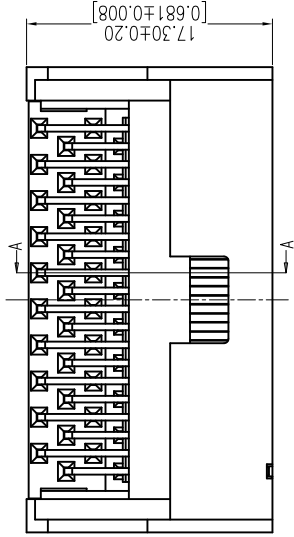

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

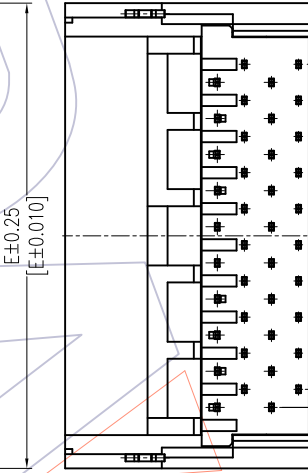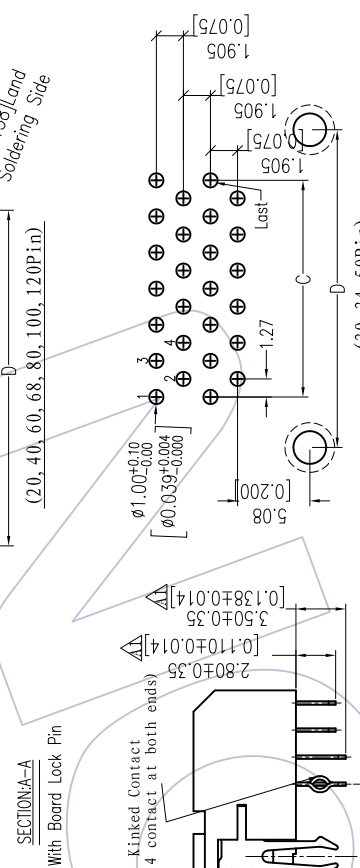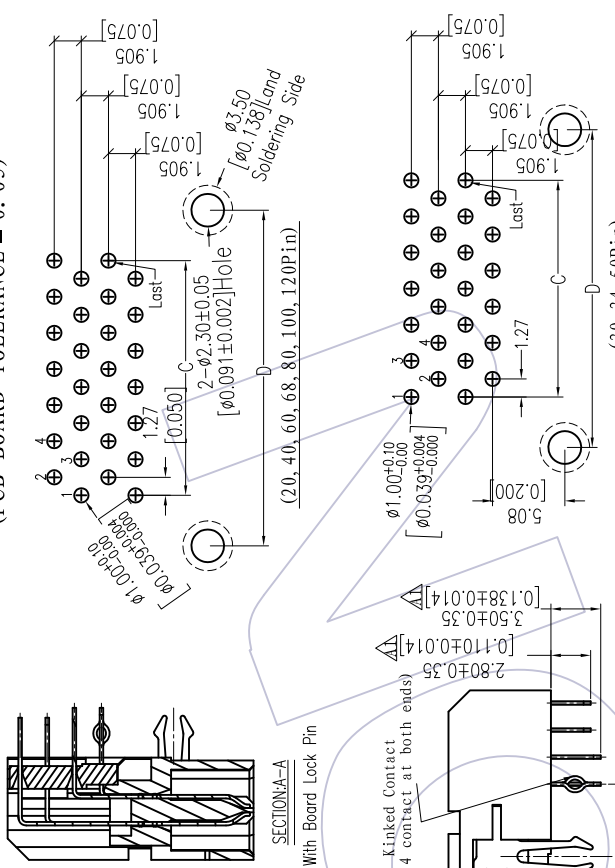

Pin 数	A	B	C	D	E
20	15.69	13.23	11.43	18.54	20.03
26	19.50	17.04	15.24	22.35	23.84
30	22.04	19.58	17.78	24.89	26.38
34	24.58	22.12	20.32	27.43	28.92
40	28.39	25.93	24.13	31.24	32.73
50	34.74	32.28	30.48	37.59	39.08
60	41.09	38.63	36.83	43.94	45.43
68	46.17	43.71	41.91	49.02	50.51
80	53.79	51.33	49.53	56.64	58.13
100	66.49	64.03	62.23	69.34	70.83
120	79.19	76.73	74.93	82.04	83.53

REV	DATE	DESCRIPTION	CHANGE	DIM	TOL	ANGLE	SHEET	SIZE	UNIT	SCALE	FIT	PART NO.
A0	2012/07/17	MODIFY	X-X	±0.40				A4	mm	1:90	Form	6320D-XXXRDSXPXT0X
A0	2012/07/06	NEW	X-XX	±0.25								TITLE: 1. 27mm SCSI "D" TYPE MALE 90° DIP
			X-XXX	±0.15								Customer NO.
			Angle	± 3'								WCON-Dongguan Http: www.wcon.com WCON-Kunshan Tel: +86 769 85358920 Tel: +86 512 57468408 Fax: +86 769 85358915 E-mail: sales@wcon.com E-mail: sales@wcon.com

WCON
 Http: www.wcon.com

WCON-Dongguan
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com

1 2 3 4 5 6 7 8 9 10